


Note:
Conduit, drain tubes and cap
may be galvanized steel or PVC.

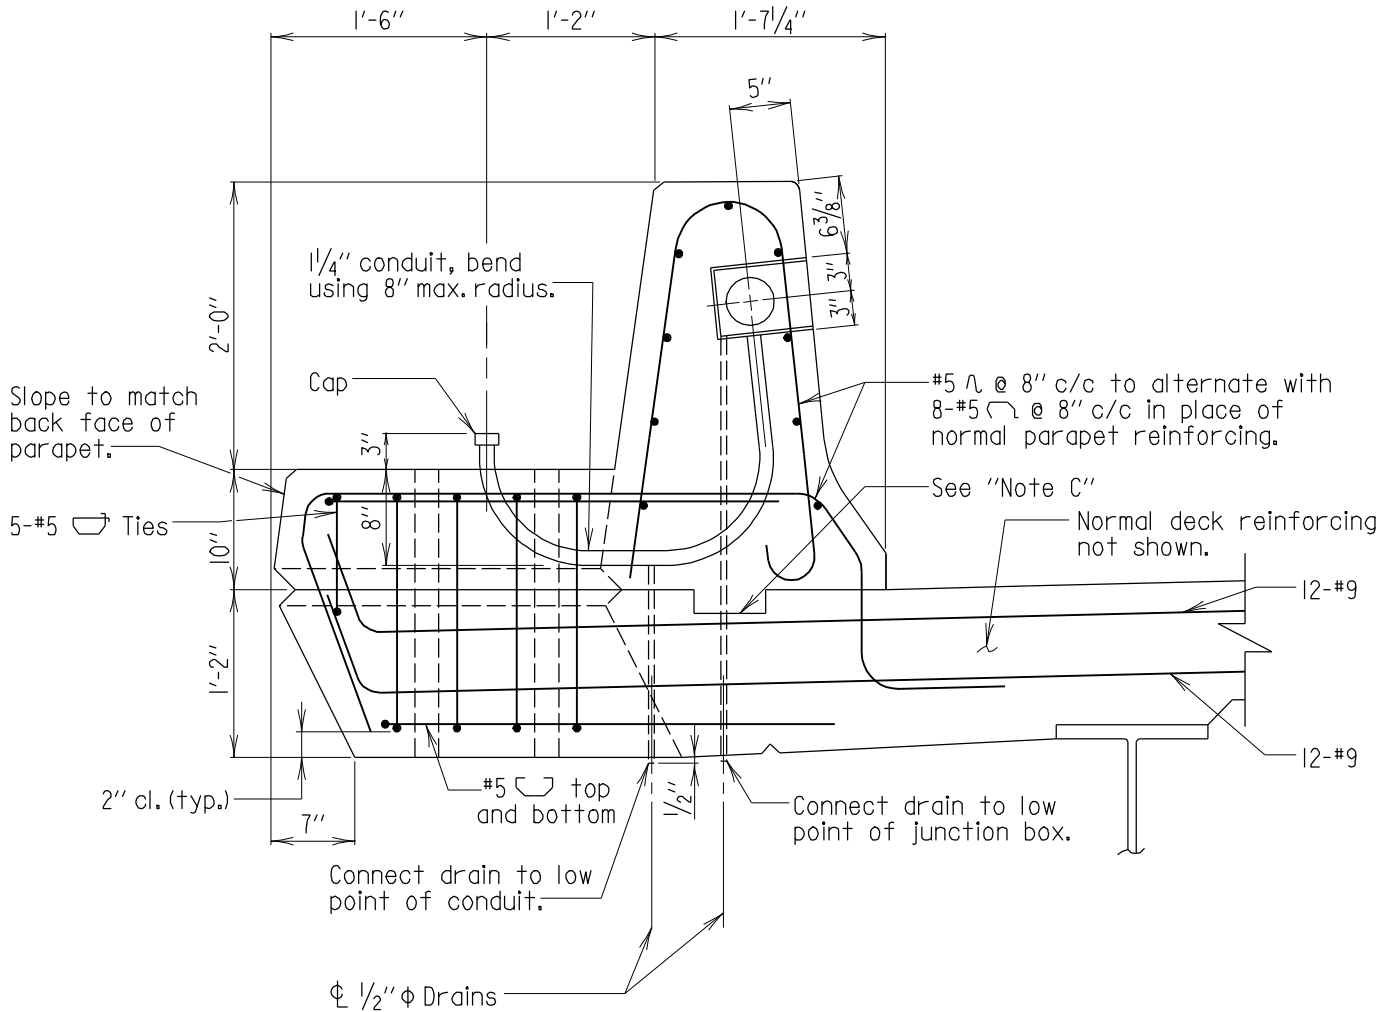

SECTION B-B
Scale: $\frac{3}{4}$ "=1'-0"

Note:
All longitudinal bars are #5's and shall be placed continuously in the parapet from expansion opening to expansion opening in a simple span bridge and expansion opening to centerline of pier in a multispan bridge. Refer to BR-SS(6.25)-03-159A.

Note C:
The constr. jt. between the F-shape parapet and the deck may vary slightly from the joint indicated. For exact details and location of the joint see "Superstructure" Sheet.

34" DIAMOND BACK

APPROVAL	
<i>L.S. Friedman</i>	DIRECTOR
	OFFICE OF BRIDGE DEVEL.
DATE: 11/8/84	
REVISIONS	
SHA	FHWA
1-8-93	.
9-24-96	.
6-1-05	.
11-26-07	.

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF BRIDGE DEVELOPMENT

SUPPORT BRACKET FOR BRIDGE MOUNTED LIGHT POST
WITH SINGLE CONDUIT AND 34" F-SHAPE PARAPET
WITH DIAMOND BACK

STANDARD NO. BR-SS(6.28)-05-167A(L)

SHEET 2 OF 2



SUPER-CONCRETE WORK